

TreCap 27 Certificate of Analysis

Introduction

Trecap 27 disposable anti-fake cap. refer to aseptic package of drinking.




Food Contact Certificates:

The additonal material and raw material components are compliance with health ccertificate in Ministry of Food, Agriculture and Livestock General Directorate of Food and Control.

Illustration

| Name | Unit | Scope of | average |
|-------------|------|-------------|---------|
| | | application | |
| Torsional | n.m | 0.4~0.8 | 0.6 |
| torque | | | |
| Height (H) | mm | 16.2~16.8 | 16.5 |
| Diameter(D) | mm | 28.7~29.2 | 28.95 |
| Length (L) | mm | 33.20~33.80 | 33.50 |
| Wide (W) | mm | 31.20~31.0 | 31.50 |
| Weight (G) | g | 3.85~3.95 | 3.9 |



Material

Food grade plastic HDPE \PP, Food grade plastic color master batch



Box Information

The box helps protect the products from harm during transport, loading and unloading. To open thebox, remove the tapes on the box or open the box with a proper cuttingtool without harming the pieces.

| Property | Carton Size/Weight | |
|--------------|--------------------|--|
| Gross Weight | 15 kg | |
| Net Weight | 13.65 kg | |
| Quantity | 3500 pcs | |
| Carton Size | 56*37*35(cm) | Article data Lot no Mould Code(Mouldcode maychange) Manufacturing date Quantity Best before date DD-MM-YYYY |

Transport Unit

Means of transport must keep clean and dry, no smell. During carrying need light loading and unloading. Throwing is strictly prohibited.

| container | Quantity(pcs) | cartons |
|---------------|---------------|---------|
| 20' | 1,365,000 | 390 |
| 20'(pallets) | 1,260,000 | 360 |
| 40HC | 3,150,000 | 900 |
| 40HC(pallets) | 2,940,000 | 840 |



20foot container




40 foot contaimer



Denomination & Quality:

Carton, plastic bag, pallet Put caps into plastic bag, then put all of them into the carton-

Quantity: 3500 pcs one carton G.W:15.kg, N.W. 13.65kg one carton Carton size:56*37*35(cm)

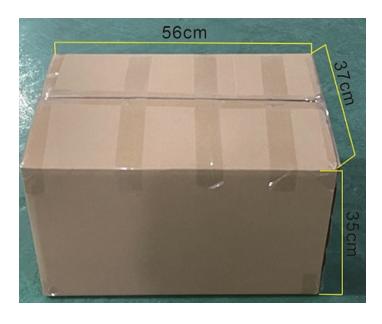





Storage and Transport Conditions

Caps have to be put on the pallets, don't to direct under the sunlight. put on the floor directly. Indoor keep Temperature: 5°C~40°C ventilation. Avoid getting wet in the rain Relative humidity: <80% or exposing Quality guarantee period:12 months